MAGNETIC SWITCHES IN THE ROUND HOUSING

Material	Case	Electrical connection	Contacts	Overall length	Temperature range	Protection grade	Options
PA, Stainless steel, Brass, Nickel plated brass	Ø8 and 12 mm/ threads M8, M10, M12, Pg7	PVC- and Silicone-cable, M12-connector	1 NO/NC, change over	30 to 100 mm/ above 100 mm on request	-40 °C up to +150 °C	Up to IP65	bistable switching characteristic

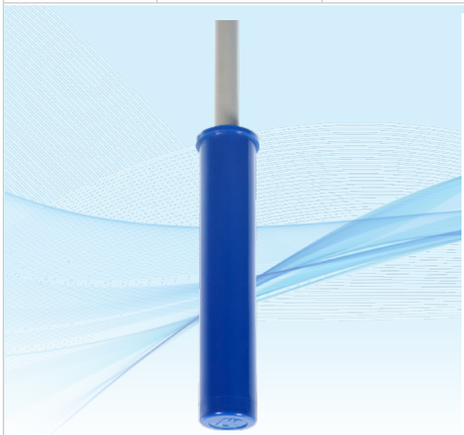

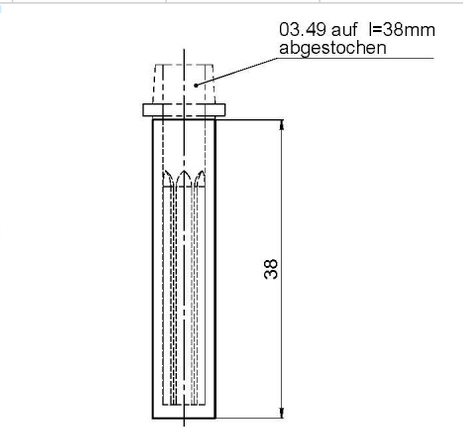

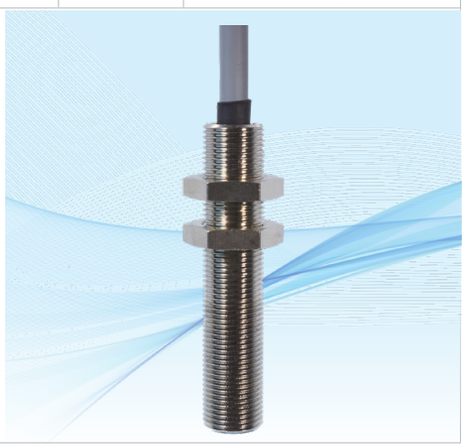

Jacob GmbH, Elektrotechnische Fabrik, Gottlieb-Daimler-Str. 11, 71394 Kernen, Germany
Phone+49 (0)7151 4011-0, info@jacob-sensors.de, www.jacob-sensors.com